


- ① 2" THICK OF 3/8" OR SMALLER AGGREGATE (NO FINES)
- ② 4" CLASS II PERMEABLE AGGREGATE BASE ROCK, COMPACT TO 95%.
- ③ FILTER FABRIC (OPTIONAL)
- ④ EDGING AND STAKE (OPTIONAL)
- ⑤ UNDISTURBED SUBGRADE OR COMPACTED TO 90%
- ⑥ RECTANGULAR DRAINAGE SLEEVE THRU PATHWAY BASE (OPTIONAL) SEE DETAIL #11 THIS PAGE

NOTE: FOR CLAY SOILS, HOLD 10' AWAY FROM FOUNDATION, AND PROVIDE SUBDRAINAGE. REVIEW WITH GEOTECH. & CIVIL ENGINEER,

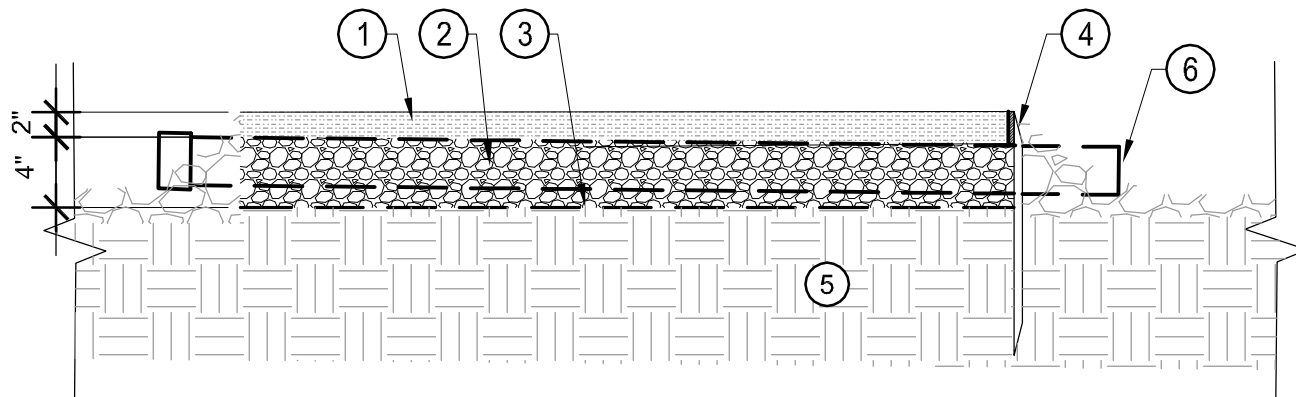

1


PERMEABLE AGGREGATE PAVING - PATH OR PATIO (OPTIONAL)

SCALE: 1"=1'-0"


- ① CONCRETE OR BRICK PAVERS (L" x W" x THK" VARIES).
PAVERS CAN BE PERVIOUS OR PERMEABLE.
SELECT PAVER PATTERN.
- ② 1" SAND SETTING BED PER MANUFACTURER, ASTM #8
- ③ JOINT FILL PER MANUFACTURER, ASTM #8
- ④ CLASS 2 PERMEABLE AGGREGATE BASE ROCK
- ⑤ FILTER FABRIC (OPTIONAL)
- ⑥ COMPACTED SUBGRADE, 90%

NOTE:

- 1. FOR CLAY SOILS, HOLD 10' AWAY FROM FOUNDATION, AND PROVIDE SUBDRAINAGE. REVIEW WITH GEOTECH. & CIVIL ENGINEER,
- 2. FOR DRAINAGE THRU PATH SEE CURB O LET DETAIL #11 THIS PAGE AND SECTION VIEW IN DETAIL #1

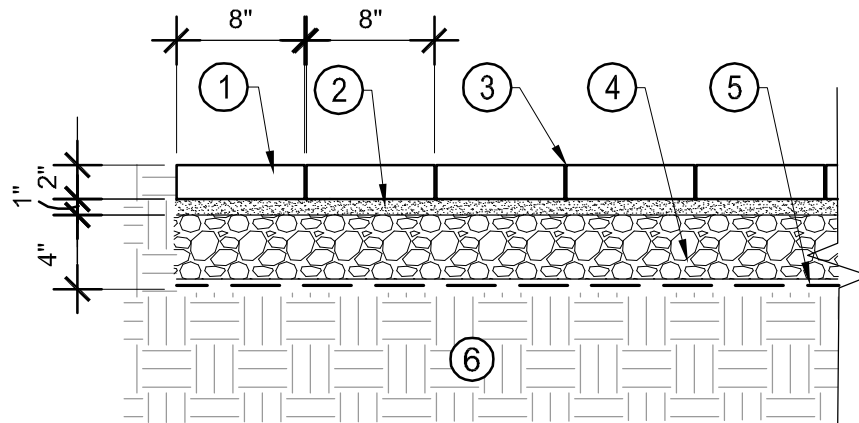

SECTION

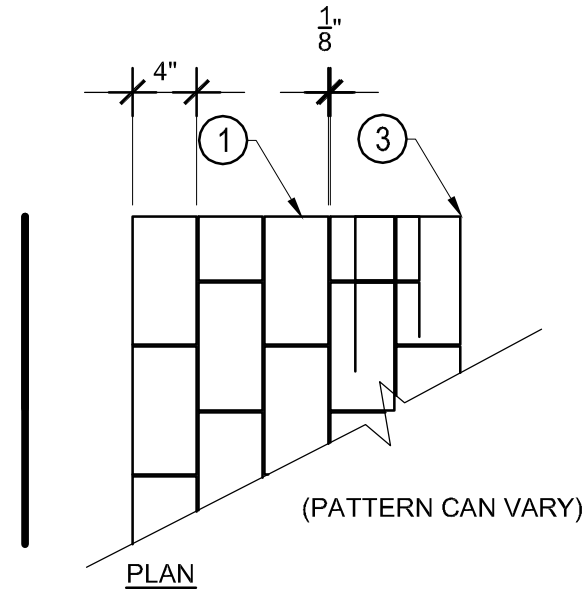

PLAN

2


PERMEABLE PAVERS - PATH OR PATIO (OPTIONAL)

SCALE: 1"=1'-0"

- ① PERVIOUS PAVER OR PERVIOUS AGGREGATE
- ② HANDTIGHT JOINTS, SAND SWEPT
- ③ METAL EDGING
- ④ AMENDED PLANTING BED; FINISH GRADE CAN SLOPE TOWARD PAVING TO INFILTRATE
- ⑤ 1" SAND SETTING BED
- ⑥ FILTER FABRIC
- ⑦ CLASS II PERMEABLE AGGREGATE BASE ROCK, OR LARGER CRUSHED DRAIN ROCK
- ⑧ COMPACTED SUBGRADE, 90%

NOTES:

- 1. FOR CLAY SOILS, HOLD 10' AWAY FROM FOUNDATION, AND PROVIDE SUBDRAINAGE. REVIEW WITH GEOTECH & CIVIL ENGINEER.
- 2. FOR DRAINAGE THRU PATH SEE CURB O LET DETAIL #11 THIS PAGE AND SECTION VIEW IN DETAIL #1

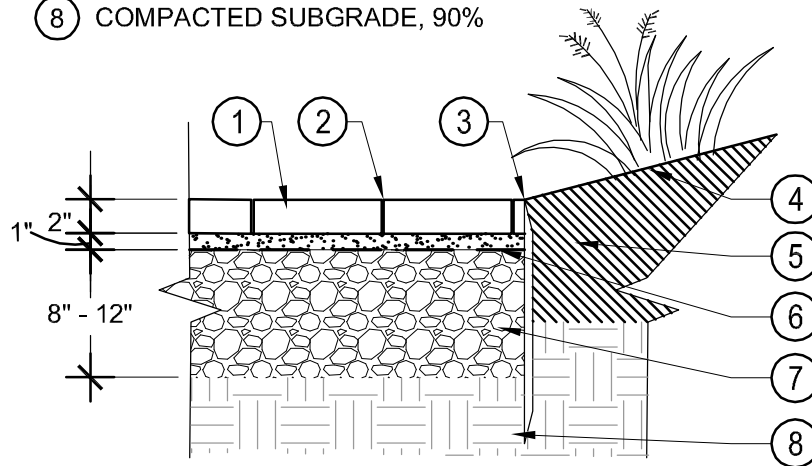

3


PERMEABLE INFILTRATION - PEDESTRIAN (OPTIONAL)

SCALE: 1"=1'-0"

- ① 1" OF 3/8" OR SMALLER PATHWAY AGGREGATE
- ② 1" OF DECOMPOSED GRANITE W/ STABILIZER PRODUCT
- ③ 4" RECYCLED CLASS II AGGREGATE BASE ROCK.
COMPACT TO 95%
- ④ FILTER FABRIC (OPTIONAL)
- ⑤ SUBGRADE UNDISTURBED OR COMPACTED TO 90%
- ⑥ 1/8" METAL EDGER, BLACK
- ⑦ ADJACENT PLANTING AREA

NOTES:

- 1. THIS PAVING IS SEMI-PERVIOUS AND SHOULD HAVE POSITIVE DRAINAGE ON SURFACE OF BASE ROCK AWAY FROM BUILDING FOUNDATIONS.
- 2. FOR DRAINAGE THRU PATH SEE CURB O LET DETAIL #11 THIS PAGE AND SECTION VIEW IN DETAIL #1

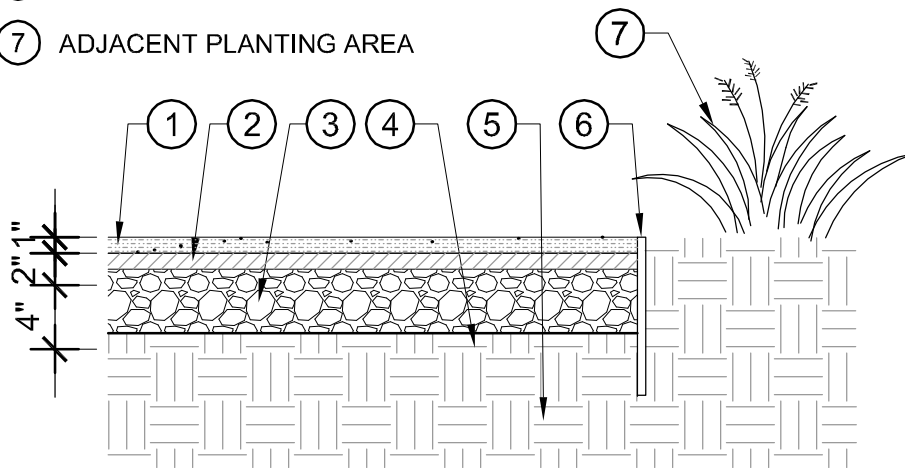


SECTION

4 AGGREGATE PAVING - PEDESTRIAN (OPTIONAL)
SCALE: 1"=1'-0"

- ① STABILIZED 3/8-" AGGREGATE; TERRAPAVE, ECO-PAVE OR EQUAL STABILIZING PRODUCT APPLIED PER MANUFACTURER SPECIFICATION. SLOPE TO PLANTINGS @ 1.5%.
- ② CLASS II RECYCLED AGGREGATE BASE, COMPACT TO 95%
- ③ SUBGRADE; UNDISTURBED OR COMPACTED TO 95%
- ④ METAL EDGE, 1/8" X 4", ALUMINUM, STEEL OR ALTERNATE
- ⑤ AMENDED SOIL OF ADJACENT PLANTING; SLOPE AWAY FROM PATH 2% MIN.

NOTES:

1. THIS PAVING IS IMPERVIOUS AND SHOULD HAVE POSITIVE DRAINAGE AWAY FROM BUILDING FOUNDATIONS.
2. FOR DRAINAGE THRU PATH SEE CURB O LET DETAIL #11 THIS PAGE AND SECTION VIEW IN DETAIL #1

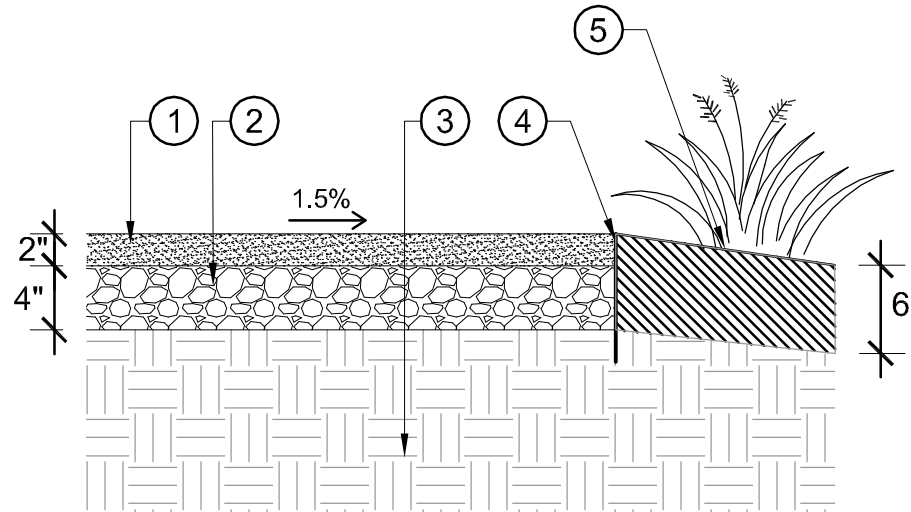



5

STABILIZED AGGREGATE - PATH OR PATIO (OPTIONAL)

SCALE: 1"=1'-0"

- ① PATHWAY PAVING MATERIAL, PROVIDE 2" SURFACING MATERIAL OVER CURB OR LET SLEEVE.
- ② AGGREGATE BASE ROCK MATERIAL PROVIDE MIN. .5" UNDER CURB OR LET SLEEVE.
- ③ FILTER FABRIC (OPTIONAL)
- ④ EDGING AND STAKE (OPTIONAL)
- ⑤ UNDISTURBED SUBGRADE OR COMPACTED TO 90%
- ⑥ CURB OR LET RECTANGULAR DRAINAGE SLEEVE THRU PATHWAY BASE OR EQUAL. SLOPE SLEEVE 1-2%.
- ⑦ PROTECT INLET AND OUTLET OF DRAINAGE SLEEVE WITH 1.5-6" RIVER COBBLE.

NOTE: MAINTAIN CHIP/BARK MULCH AWAY FROM RAINWATER SYSTEMS BY USING PEA GRAVEL AND COBBLE.

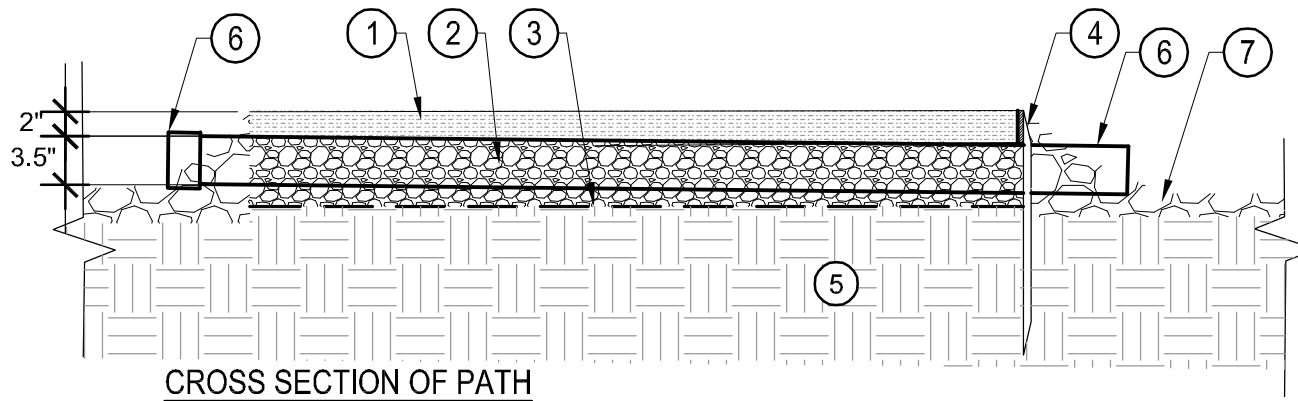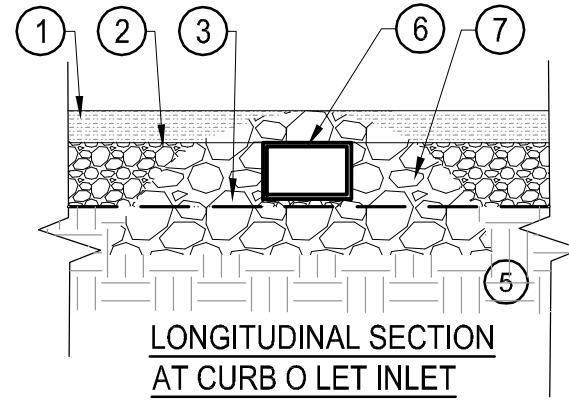

11 RECTANGULAR DRAINAGE SLEEVE IN PATHS (OPTIONAL)

SCALE: N. T. S.